


3. Cable with one end connecting to an assembly connector with no assigned Ref. Des. and the other end with two wires to be connected to socket pins on an assembly.

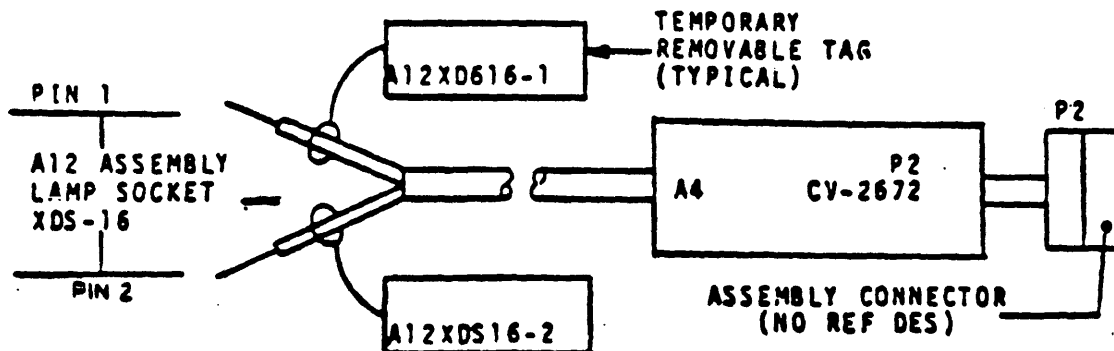

3.2.2 **Marking Notes.** Two standard styles of marking notes shall be used as appropriate on Air Force drawings. Typical examples of these notes are below:

- a. The part number identification for this part is (A.F. FSCM) xxxxxxxxxx-xxx with the manufacturer (MFR) identification directly below it. Apply the part number in accordance with 8387979 in the specified areas.
- b. Identify this part MIL-STD-130. (A second marking note calls out 8387979 to specify marking methods and materials only.)


#### 3.2.2.1 Parts, subassemblies, assemblies, units, groups, and source control items

- a. Sample marking note:

4 The part number identification for this part is 50464-8387938-01 with the manufacturer (MFR) designation directly below it. Apply the identification number in accordance with 8387979 in the specified area.

- b. Data marking examples (Air Force code ident and part or assy number plus manufacturer's code ident or trademark):

1. Parts (Pieces, Except those too Small to Provide Marking Area):

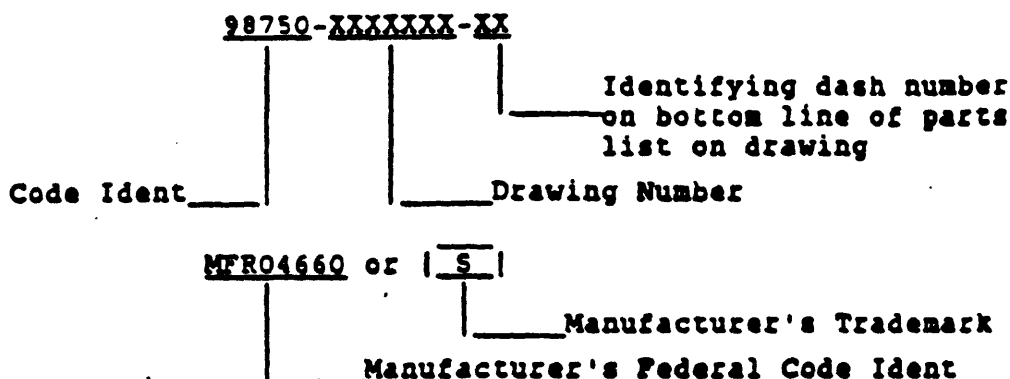

Example: 98750-7245646-10  
MFR04660

Issue	Size	AF Code Ident	Drawing No.
D	A	50464	8387979